


FortiGate®-VM on Linux KVM





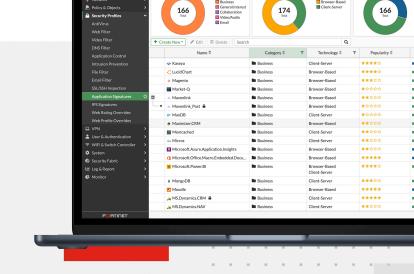

Highlights

- Comprehensive network security functions, including firewall, VPN, intrusion prevention, web filtering, anti-virus, and anti-malware protection
- A high degree of flexibility and scalability to meet the changing needs
- Can be easily and quickly deployed in a virtual environment, reducing hardware costs and increasing operational efficiency
- Support high availability configurations to ensure network security and uptime

Delivering Next Generation Firewall Capabilities

The FortiGate-VM on Linux KVM delivers nextgeneration firewall capabilities for organizations of all sizes, with the flexibility to be deployed as nextgeneration firewall or VPN gateway. It protects against cyber threats with high performance, security efficacy, and deep visibility.

FortiGate VM allows administrators to easily and quickly deploy network security in a virtual environment, providing a high level of flexibility and scalability to meet the changing needs. It offers the benefits of virtualization, such as reduced hardware costs, increased operational efficiency, and easier disaster recovery and business continuity.

1



Available in



Appliance



Virtua



Hosted



Cloud



Container

FortiOS Everywhere

FortiOS, Fortinet's advanced operating system

FortiOS enables the convergence of high performing networking and security across the Fortinet Security Fabric. Because it can be deployed anywhere, it delivers consistent and context-aware security posture across network, endpoint, and multi-cloud environments.

FortiOS powers all FortiGate deployments whether a physical or virtual device, as a container, or as a cloud service. This universal deployment model enables the consolidation of many technologies and use cases into a simplified, single policy and management framework. Its organically built best-of-breed capabilities, unified operating system, and ultra-scalability allows organizations to protect all edges, simplify operations, and run their business without compromising performance or protection.

FortiOS dramatically expands the Fortinet Security Fabric's ability to deliver advanced AI/ML-powered services, inline advanced sandbox detection, integrated ZTNA enforcement, and more, provides protection across hybrid deployment models for hardware, software, and Software-as-a-Service with SASE.

FortiOS expands visibility and control, ensures the consistent deployment and enforcement of security policies, and enables centralized management across large-scale networks with the following key attributes:

- Interactive drill-down and topology viewers that display real-time status
- On-click remediation that provides accurate and quick protection against threats and abuses
- Unique threat score system correlates weighted threats with users to prioritize investigations



Intuitive easy to use view into the network and endpoint vulnerabilities



Visibility with FOS Application Signatures

FortiConverter Migration Service

FortiConverter Service provides hassle-free migration to help organizations transition from a wide range of legacy firewalls to FortiGate Next-Generation Firewalls quickly and easily. The service eliminates errors and redundancy by employing best practices with advanced methodologies and automated processes. Organizations can accelerate their network protection with the latest FortiOS technology.





FortiGuard Services

Network and File Security

Services provide protection against network-based and file-based threats. This consists of Intrusion Prevention (IPS) which uses AI/M models to perform deep packet/SSL inspection to detect and stop malicious content, and apply virtual patching when a new vulnerability is discovered. It also includes Anti-Malware for defense against known and unknown file-based threats. Anti-malware services span both antivirus and file sandboxing to provide multi-layered protection and are enhanced in real-time with threat intelligence from FortiGuard Labs. Application Control enhances security compliance and offers real-time application visibility.

Web / DNS Security

Services provide protection against web-based threats including DNS-based threats, malicious URLs (including even in emails), and botnet/command and control communications. DNS filtering provides full visibility into DNS traffic while blocking high-risk domains, and protects against DNS tunneling, DNS infiltration, C2 server ID and Domain Generation Algorithms (DGA). URL filtering leverages a database of 300M+ URLs to identify and block links to malicious sites and payloads. IP Reputation and anti-botnet services prevent botnet communications, and block DDoS attacks from known sources.

SaaS and Data Security

Services address numerous security use cases across application usage as well as overall data security. This consists of Data Leak Prevention (DLP) which ensures data visibility, management and protection (including blocking exfiltration) across networks, clouds, and users, while simplifying compliance and privacy implementations. Separately, our Inline Cloud Access Security Broker (CASB) service protects data in motion, at rest, and in the cloud. The service enforces major compliance standards and manages account, user and cloud application usage. Services also include capabilities designed to continually assess your infrastructure, validate that configurations are working effectively and secure, and generate awareness of risks and vulnerabilities that could impact business operations. This includes coverage across IoT devices for both IoT detection and IoT vulnerability correlation.

Zero-Day Threat Prevention

Zero-day threat prevention entails Fortinet's Al-based inline malware prevention, our most advanced sandbox service, to analyze and block unknown files in real-time, offering subsecond protection against zero-day and sophisticated threats across all NGFWs. The service also has a built-in MITRE ATT&CK® matrix to accelerate investigations. The service focuses on comprehensive defense by blocking unknown threats while streamlining incident response efforts and reducing security overhead.

OT Security

The service provides OT detection, OT vulnerability correlation, virtual patching, OT signatures, and industry-specific protocol decoders for overall robust defense of OT environments and devices.







Advanced Virtual Security Processing Units (vSPUs)

Virtual firewalls are commonly used to protect virtualized environments in software-defined data centers and multi-cloud environments on the basis that they are the least expensive and the most portable, enabling users to easily move a virtual firewall from cloud to cloud. One disadvantage of most virtual firewalls is that they deliver significantly lower network throughput as compared with physical firewalls, creating bottlenecks throughout the network and reducing business agility and performance.

FortiGate virtual firewalls (FortiGate-VM), featuring advanced virtual security processing units (vSPUs), overcome the throughput barrier to provide top performance in private and public clouds. With FortiGate-VM, organizations can securely migrate any application and support a variety of use cases, including highly available large-scale virtual private networks (VPNs) in the cloud."

FortiGate-VM removes the cost-performance barriers to adopting virtual NGFWs, with several industry-leading features:

- The FortiGate-VM vSPU is a unique technology that enhances performance by offloading
 part of packet processing to user space, while using a kernel bypass solution within the
 operating system. With vSPU enabled, FortiGate-VM can achieve more than triple the
 throughput for a UDP firewall rule
- Support for Intel QuickAssist Technology (Intel QAT), working on the latest QuickAssist
 Adapters, accelerates traffic processing through site-to-site IPSec VPNs. With QAT enabled,
 FortiGate-VM can achieve two to three times throughput improvements depending on the
 packet frame size
- Fortinet is the first NGFW vendor to support AWS C5n instances, which enables
 organizations to use a virtual firewall to secure compute-heavy applications in the cloud





Intuitive view and clear insights into network security posture with FortiManager

Centralized Network and Security Management at Scale

FortiManager, the centralized management solution from Fortinet, enables integrated management of the Fortinet security fabric, including devices like FortiGate, FortiSwitch, and FortiAP. It simplifies and automates the oversight of network and security functions across diverse environments, serving as the fundamental component for deploying Hybrid Mesh Firewalls.



Deployment



Next Generation Firewall (NGFW)


- Reduce complexity by combining threat protection security capabilities into single highperformance network security appliances
- Identify and stop threats with powerful intrusion prevention beyond port and protocol that examines the actual applications in your network traffic
- Deliver the industry's highest SSL inspection performance using industry-mandated ciphers while maximizing ROI
- Proactively block newly discovered sophisticated attacks in real-time with advanced threat protection



VPN Gateway

- Direct Connect utilizing FortiGate firewalls for SSL and IPsec VPNs into and out of the AWS VPCs
- VGW to FortiGate VPN between VPCs
- Hybrid cloud site to site IPsec VPN
- Remote access VPN

Gain Comprehensive Visibility and Apply Consistent Control

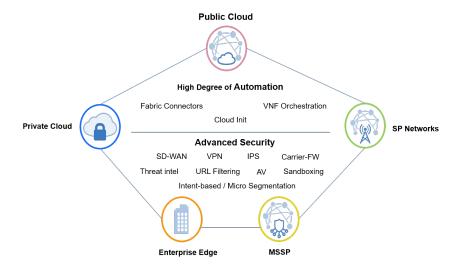



Technologies

SR-IOV (Single Root I/O Virtualization)

In enabling SR-IOV on the KVM host, a single physical network controller can be partitioned into multiple virtual interfaces (called virtual functions (VFs)), consisting of an ESXi virtual network pool of adapters, which can be used by local host processors or directly by virtual machines like the FortiGate-VM. The VM then talks directly to the network adapters through Direct Memory Access (DMA) by bypassing virtualization transports, which will improve north-south network performance.

Data Plane Development Kit (DPDK) and vNP Offloading

DPDK and vNP enhance FortiGate-VM performance by offloading part of packet processing to userspace while bypassing kernel within the operating system. The capability must be enabled and configured with FortiGate CLI commands.



Specifications

	FortiGate-	VM01/01S	FortiGate-VM02/02S		
Technical Specifications					
vCPU Support (Minimum / Maximum)	1.	/ 1	1/2		
Memory Support (Minimum)	2	GB	2 GB		
Network Interface Support (Minimum / Maximum) 1	1/	24	1 / 24		
Storage Support (Minimum / Maximum)	32 GB	/ 2 TB	32 GB / 2 TB		
Wireless Access Points Controlled (Tunnel / Global)	32	/ 64	512 / 1024		
Virtual Domains (Default / Maximum) ²	10	/ 10	10 ,	/ 25	
Firewall Policies	10 (000	10 000		
Maximum Number of Registered Endpoints	20	00	2000		
Unlimited User License	Y	Yes Yes			
System Performance	SR-IOV/vSPU-off	SR-IOV/vSPU-on	SR-IOV/vSPU-off	SR-IOV/vSPU-on	
Firewall Throughput (UDP Packets, 1518 Byte)	10.5 Gbps	N/A ⁸	15.7 Gbps	40.2 Gbps	
Firewall Throughput (UDP Packets, 512 Byte)	4.5 Gbps	4.5 Gbps N/A ⁸		13.1 Gbps	
Firewall Throughput (UDP Packets, 64 Byte)	0.9 Gbps	0.9 Gbps N/A ⁸		1.9 Gbps	
PSec VPN UDP Throughput-1360 (AES256GCM)	0.6 Gbps	N/A ⁸	1 Gbps	10.8 Gbps	
New Sessions / Second (TCP)	100K	N/A ⁸	151K	99K	
Concurrent Connections (TCP)	1.5M (RAM: 4GB)	N/A ⁸	3.5M (RAM: 8GB) 1.5M (RAM: 8		
Application Control Throughput (HTTP 64K)	1.5 Gbps	Gbps N/A 8 2.8 Gbps		3 Gbps	
PS Throughput (Enterprise Mix)	0.9 Gbps	0.9 Gbps N/A ⁸		2.2 Gbps	
PS Throughput (HTTP 1M)	1.3 Gbps	1.3 Gbps N/A ⁸		2.4 Gbps	
NGFW Throughput (Enterprise Mix)	0.7 Gbps	0.7 Gbps N/A ⁸		1.6 Gbps	
Threat Protection Throughput (Enterprise Mix)	0.4 Gbps	N/A ⁸	1.1 Gbps 1.2 Gb		
SSL VPN Throughput	1.5 Gbps N/A ⁸ 1.6 Gbps		N/A		
nline SSL IPS HTTPS Throughput (TLS v1.2)	0.5 Gbps	N/A ⁸	0.9 Gbps	1.2 Gbps	

Note. All performance values are "up to" and vary depending on system configuration.

Datasheet numbers should only be used as a guidance for VM sizing, rather than a definitive information since performance measures vary quite significantly based up on the selected testbed (hardware + host OS), FortiOS version and configuration, as well as the tunning applied to achieve more performance. For numbers alinged with your own environment, make sure you engage with one of our pre-sales representatives for specific guidance before purchasing any licenses.

Actual performance may vary depending on the network and system configuration. Note that these metrics are updated periodically as the product performance keeps improving through internal testing. The discrepancy in the performance numbers may be noted in different versions of the document so ensure that you refer to the latest datasheets.

Performance metrics were observed using DELL R740 (CPU Intel Xeon Platinum 8268 CPU, 192G memory), with SRIVO NIC Intel X710. Tested with FortiOS 7.0.6 running on KVM/RedHat 8.4.

vSPU refers to the combination of FortiOS vNP and DPDK libraries in the FortiGate-VM. vNP is the software emulation of a subset of Fortinet's Network Processor (NP).

- Applicable to 7.0.6+. The actual working number of consumable network interfaces varies depending on the Linux RedHat KVM instance types/sizes and may be less.
- FG-VMxxV and FG-VMxxS series do not come with a multi-VDOM feature by default.
 You can add it by applying separate VDOM addition perpetual/subscription licenses. See
 ORDER INFORMATION for VDOM SKUs.
- 3. IPS performance is measured using Enterprise Traffic Mix and 1 Mbyte HTTP.
- 4. Application Control performance is measured with 64 Kbyte HTTP traffic.
- 5. NGFW performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix.
- 6. Threat Protection performance is measured with IPS and Application Control and Malware protection enabled, based on Enterprise Traffic Mix
- 7. SSL-VPN does not support vSPU in the tested firmware.
- 8. vSPU requires at least 2vCPUs.



Specifications

	FortiGate-	VM04/04S	FortiGate-VM08/08S			
Technical Specifications						
vCPU Support (Minimum / Maximum)	1,	/ 4	1/8			
Memory Support (Minimum)	2	GB	2	2 GB		
Network Interface Support (Minimum / Maximum) 1	1/	24	1/	1/24		
Storage Support (Minimum / Maximum)	32 GB	/ 2 TB	32 GB	32 GB / 2 TB		
Wireless Access Points Controlled (Tunnel / Global)	512 /	1024	1024	1024 / 4096		
Virtual Domains (Default / Maximum) ²	10	/ 50	10 /	10 / 500		
Firewall Policies	10 000 200 000					
Maximum Number of Registered Endpoints	8 000 20 000			000		
Unlimited User License	Yes Yes		es			
System Performance	SR-IOV/vSPU-off	SR-IOV/vSPU-on	SR-IOV/vSPU-off	SR-IOV/vSPU-on		
Firewall Throughput (UDP Packets, 1518 Byte)	30 Gbps	71.2 Gbps	44.2 Gbps	110.3 Gbps		
Firewall Throughput (UDP Packets, 512 Byte)	12.8 Gbps 26.3 Gbps		19.7 Gbps	36.8 Gbps		
Firewall Throughput (UDP Packets, 64 Byte)	2.2 Gbps 2.6 Gbps		3.8 Gbps	4.5 Gbps		
IPSec VPN UDP Throughput-1360 (AES256GCM)	2.2 Gbps	20 Gbps	5.5 Gbps	32.5 Gbps		
New Sessions / Second (TCP)	122K	122K 160K		251K		
Concurrent Connections (TCP)	6M (RAM: 12GB) 2.5M (RAM: 12GB)		12M (RAM: 24GB)	6.5M (RAM: 24GB)		
Application Control Throughput (HTTP 64K)	5.4 Gbps	5.4 Gbps 5.7 Gbps		11.8 Gbps		
IPS Throughput (Enterprise Mix)	3.5 Gbps 3.8 Gbps		6.1 Gbps	6.5 Gbps		
IPS Throughput (HTTP 1M)	4.3 Gbps 4.7 Gbps		8.1 Gbps	11.5 Gbps		
NGFW Throughput (Enterprise Mix)	2.9 Gbps 3.1 Gbps		5 Gbps	4.8 Gbps		
Threat Protection Throughput (Enterprise Mix)	1.9 Gbps 1.9 Gbps		3.8 Gbps	4.2 Gbps		
SSL VPN Throughput	3.9 Gbps	N/A	7.9 Gbps	N/A		

2.3 Gbps

1.7 Gbps

Note. All performance values are "up to" and vary depending on system configuration.

Inline SSL IPS HTTPS Throughput (TLS v1.2)

Datasheet numbers should only be used as a guidance for VM sizing, rather than a definitive information since performance measures vary quite significantly based up on the selected testbed (hardware + host OS), FortiOS version and configuration, as well as the tunning applied to achieve more performance. For numbers alinged with your own environment, make sure you engage with one of our pre-sales representatives for specific guidance before purchasing any licenses.

Actual performance may vary depending on the network and system configuration. Note that these metrics are updated periodically as the product performance keeps improving through internal testing. The discrepancy in the performance numbers may be noted in different versions of the document so ensure that you refer to the latest datasheets.

Performance metrics were observed using DELL R740 (CPU Intel Xeon Platinum 8268 CPU, 192G memory), with SRIVO NIC Intel X710. Tested with FortiOS 7.0.6 running on KVM/RedHat 8.4.

vSPU refers to the combination of FortiOS vNP and DPDK libraries in the FortiGate-VM. vNP is the software emulation of a subset of Fortinet's Network Processor (NP).

 Applicable to 7.0.6+. The actual working number of consumable network interfaces varies depending on the Linux RedHat KVM instance types/sizes and may be less.

3.3 Gbps

4.5 Gbps

- FG-VMxxV and FG-VMxxS series do not come with a multi-VDOM feature by default.
 You can add it by applying separate VDOM addition perpetual/subscription licenses. See
 ORDER INFORMATION for VDOM SKUs.
- 3. IPS performance is measured using Enterprise Traffic Mix and 1 Mbyte HTTP.
- 4. Application Control performance is measured with 64 Kbyte HTTP traffic.
- 5. NGFW performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix
- 6. Threat Protection performance is measured with IPS and Application Control and Malware protection enabled, based on Enterprise Traffic Mix
- 7. SSL-VPN does not support vSPU in the tested firmware.
- 8. vSPU requires at least 2vCPUs.



Specifications

	FortiGate-VM16/16S	FortiGate-VM32/32S
Technical Specifications		
vCPU Support (Minimum / Maximum)	1 / 16	1 / 32
Memory Support (Minimum)	2 GB	2 GB
Network Interface Support (Minimum / Maximum) ¹	1 / 24	1 / 24
Storage Support (Minimum / Maximum)	32 GB / 2 TB	32 GB / 2 TB
Wireless Access Points Controlled (Tunnel / Global)	1024 / 4096	1024 / 4096
Virtual Domains (Default / Maximum) ²	10 / 500	10 / 500
Firewall Policies	200 000	200 000
Maximum Number of Registered Endpoints	20 000	20 000
Unlimited User License	Yes	Yes

System Performance	SR-IOV/vSPU-off	SR-IOV/vSPU-on	SR-IOV/vSPU-off	SR-IOV/vSPU-on
Firewall Throughput (UDP Packets, 1518 Byte)	65.3 Gbps	110.7 Gbps	96.7 Gbps	111.9 Gbps
Firewall Throughput (UDP Packets, 512 Byte)	33.8 Gbps	37.5 Gbps	44 Gbps	41.3 Gbps
Firewall Throughput (UDP Packets, 64 Byte)	5 Gbps	4.9 Gbps	7.4 Gbps	6 Gbps
IPSec VPN UDP Throughput-1360 (AES256GCM)	6.9 Gbps	42.3 Gbps	11.1 Gbps	47.3 Gbps
New Sessions / Second (TCP)	684K	520K	822K	423K
Concurrent Connections (TCP)	27M (RAM: 48GB)	14M (RAM: 48GB)	55.3M (RAM: 96GB)	29M (RAM: 96GB)
Application Control Throughput (HTTP 64K)	21.5 Gbps	22.6 Gbps	27.6 Gbps	36.1 Gbps
IPS Throughput (Enterprise Mix)	11.1 Gbps	12.7 Gbps	16.1 Gbps	22.5 Gbps
IPS Throughput (HTTP 1M)	11.7 Gbps	18.4 Gbps	16.9 Gbps	22.8 Gbps
NGFW Throughput (Enterprise Mix)	9.3 Gbps	10.6 Gbps	14.6 Gbps	16.8 Gbps
Threat Protection Throughput (Enterprise Mix)	7.2 Gbps	7.8 Gbps	11.5 Gbps	13.5 Gbps
SSL VPN Throughput	8.5 Gbps	N/A	11.7 Gbps N/A	
Inline SSL IPS HTTPS Throughput (TLS v1.2)	6.6 Gbps	8.8 Gbps	10 Gbps	11 Gbps

	FortiGate-VMUL/ULS
Technical Specifications	
vCPU Support (Minimum / Maximum)	1 / unlimited
Memory Support (Minimum)	2 GB
Network Interface Support (Minimum / Maximum) ¹	1 / 24
Storage Support (Minimum / Maximum)	32 GB / 2 TB
Wireless Access Points Controlled (Tunnel / Global)	1024 / 4096
Virtual Domains (Default / Maximum) ²	10 / 500
Firewall Policies	200 000
Maximum Number of Registered Endpoints	20 000
Unlimited User License	Yes

Note. All performance values are "up to" and vary depending on system configuration.

Datasheet numbers should only be used as a guidance for VM sizing, rather than a definitive information since performance measures vary quite significantly based up on the selected testbed (hardware + host OS), FortiOS version and configuration, as well as the tunning applied to achieve more performance. For numbers alinged with your own environment, make sure you engage with one of our pre-sales representatives for specific guidance before purchasing any licenses.

Actual performance may vary depending on the network and system configuration. Note that these metrics are updated periodically as the product performance keeps improving through internal testing. The discrepancy in the performance numbers may be noted in different versions of the document so ensure that you refer to the latest datasheets.

Performance metrics were observed using DELL R740 (CPU Intel Xeon Platinum 8268 CPU, 192G memory), with SRIVO NIC Intel X710. Tested with FortiOS 7.0.6 running on KVM/RedHat 8.4

vSPU refers to the combination of FortiOS vNP and DPDK libraries in the FortiGate-VM. vNP is the software emulation of a subset of Fortinet's Network Processor (NP).

- Applicable to 7.0.6+. The actual working number of consumable network interfaces varies depending on the Linux RedHat KVM instance types/sizes and may be less.
- FG-VMxxV and FG-VMxxS series do not come with a multi-VDOM feature by default.
 You can add it by applying separate VDOM addition perpetual/subscription licenses. See
 ORDER INFORMATION for VDOM SKUs.
- 3. IPS performance is measured using Enterprise Traffic Mix and 1 Mbyte HTTP.
- 4. Application Control performance is measured with 64 Kbyte HTTP traffic.
- 5. NGFW performance is measured with IPS and Application Control enabled, based on Enterprise Traffic Mix
- 6. Threat Protection performance is measured with IPS and Application Control and Malware protection enabled, based on Enterprise Traffic Mix
- 7. SSL-VPN does not support vSPU in the tested firmware.
- 8. vSPU requires at least 2vCPUs.



Ordering Information

The following SKUs adopt the perpetual licensing scheme:

Product	SKU	Description
FortiGate-VM01	FG-VM01	FortiGate-VM 'virtual appliance'. 1x vCPU core.
FortiGate-VM02	FG-VM02	FortiGate-VM 'virtual appliance'. 2x vCPU cores.
FortiGate-VM04	FG-VM04	FortiGate-VM 'virtual appliance'. 4x vCPU cores.
FortiGate-VM08	FG-VM08	FortiGate-VM 'virtual appliance'. 8x vCPU cores.
FortiGate-VM16	FG-VM16	FortiGate-VM 'virtual appliance'. 16x vCPU cores.
FortiGate-VM32	FG-VM32	FortiGate-VM 'virtual appliance'. 32x vCPU cores.
FortiGate-VMUL	FG-VMUL	FortiGate-VM 'virtual appliance'. Unlimited vCPU cores.
Optional Accessories/Spares	SKU	Description
Virtual Domain License Add 5	FG-VDOM-5-UG	Upgrade license for adding 5 VDOMs to FortiOS 5.4 and later, limited by platform maximum VDOM capacity.
Virtual Domain License Add 15	FG-VDOM-15-UG	$ Upgrade\ license\ for\ adding\ 15\ VDOMs\ to\ FortiOS\ 5.4\ and\ later,\ limited\ by\ platform\ maximum\ VDOM\ capacity.$
Virtual Domain License Add 25	FG-VDOM-25-UG	Upgrade license for adding 25 VDOMs to FortiOS 5.4 and later, limited by platform maximum VDOM capacity.
Virtual Domain License Add 50	FG-VDOM-50-UG	Upgrade license for adding 50 VDOMs to FortiOS 5.4 and later, limited by platform maximum VDOM capacity.
Virtual Domain License Add 240	FG-VDOM-240-UG	Upgrade license for adding 240 VDOMs to FortiOS 5.4 and later, limited by platform maximum VDOM capacity.

FortiGate-VM 6.2.2 no longer has RAM restriction on all vCPU models while prior versions still restrict RAM sizes per model. Upgrade to 6.2.2 is necessary to remove the restriction.

The following SKUs adopt the annual subscription licensing scheme:

Product	SKU	Description
FortiGate-VM01-S	FC1-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (1 vCPU core).
FortiGate-VM02-S	FC2-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (2 vCPU cores).
FortiGate-VM04-S	FC3-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (4 vCPU cores).
FortiGate-VM08-S	FC4-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (8 vCPU cores).
FortiGate-VM16-S	FC5-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (16 vCPU cores).
FortiGate-VM32-S	FC6-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (32 vCPU cores).
FortiGate-VMUL-S	FC7-10-FGVVS- <support bundle="">-02-DD</support>	Subscriptions license for FortiGate-VM (Unlimited vCPU cores).

FortiOS 6.2.3+ and 6.4.0+ support the FortiGate-VM S-series. The FortiGate-VM S-series does not have RAM restrictions on all vCPU levels. FortiManager 6.2.3+ and 6.4.0+ support managing FortiGate-VM S-series devices.



For the sizing guide, please refer to the sizing document available on www.fortinet.com



Subscriptions

				Bundles	
Service Category	Service Offering	A-la-carte	Enterprise Protection	Unified Threat Protection	Advanced Threat Protection
FortiGuard Security Services	IPS — IPS, Malicious/Botnet URLs	•	•	•	•
	Anti-Malware Protection (AMP)—AV, Botnet Domains, Mobile Malware, Virus Outbreak Protection, Content Disarm and Reconstruct ³ , Al-based Heurestic AV, FortiGate Cloud Sandbox	•	•	•	•
	URL, DNS and Video Filtering — URL, DNS and Video ³ Filtering, Malicious Certificate	•	•	•	
	Anti-Spam		•	•	
	Al-based Inline Malware Prevention ³	•	•		
	Data Loss Prevention (DLP) ¹	•	•		
	Attack Surface Security — IoT Device Detection, IoT Vulnerability Correlation and Virtual Patching, Security Rating, Outbreak Check	•	•		
	OT Security—OT Device Detection, OT vulnerability correlation and Virtual Patching, OT Application Control and IPS 1	•			
	Application Control		included with FortiCare Subscription		
	Inline CASB ³		includ	ed with FortiCare Subs	scription
SD-WAN and SASE Services	SD-WAN Underlay Bandwidth and Quality Monitoring	Models up to FG/ FWF-60F series			
	SD-WAN Underlay and Application Monitoring Service	FG-70F series and above			
	SD-WAN Overlay-as-a-Service	•			
	SD-WAN Connector for FortiSASE Secure Private Access	•			
	SASE expansion for SD-WAN (SD-WAN SPA Connector license plus FortiSASE starter kit for n* users) $^{\rm 2}$	Selected models only ²			
	SASE connector for FortiSASE Secure Edge Management (with 10Mbps Bandwidth)	Desktop models only			
NOC and SOC Services	FortiConverter Service for one time configuration conversion	•	•		
Sei vices	Managed FortiGate Service—available 24×7, with Fortinet NOC experts performing device setup, network, and policy change management	•			
	FortiGate Cloud—Management, Analysis, and One Year Log Retention	•			
	FortiManager Cloud	•			
	FortiAnalyzer Cloud	•			
	FortiGuard SOCaaS—24×7 cloud-based managed log monitoring, incident triage, and SOC escalation service	•			
Hardware and Software Support	FortiCare Essentials	Desktop models only			
	FortiCare Premium	•	•	•	•
	FortiCare Elite	•			
Base Services	Device/OS Detection, GeoIPs, Trusted CA Certificates, Internet Services and Botnet IPs, DDNS (v4/v6), Local Protection, PSIRT Check, Anti-Phishing		includ	ed with FortiCare Subs	scription

- 1. Full features available when running FortiOS 7.4.1.
- $2. \ See the \ FortiSASE \ Ordering \ Guide \ for \ supported \ models \ and \ their \ associated \ number \ of \ user \ licenses.$
- 3. Not available for FortiGate/FortiWiFi 40F, 60E, 60F, 80E, and 90E series from 7.4.4 onwards. Not available for FortiGate/FortiWiFi 30G and 50G series in any OS build.



FortiGuard Bundles

FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.




FortiCare Services

Fortinet prioritizes customer success through FortiCare Services, optimizing the Fortinet Security Fabric solution. Our comprehensive lifecycle services include Design, Deploy, Operate, Optimize, and Evolve. The FortiCare Elite, one of the service variants, offers heightened SLAs and swift issue resolution with a dedicated support team. This advanced support option includes an Extended End-of-Engineering-Support of 18 months, providing flexibility. Access the intuitive FortiCare Elite Portal for a unified view of device and security health, streamlining operational efficiency and maximizing Fortinet deployment performance.



Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the Fortinet EULA and report any suspected violations of the EULA via the procedures outlined in the Fortinet Whistleblower Policy.

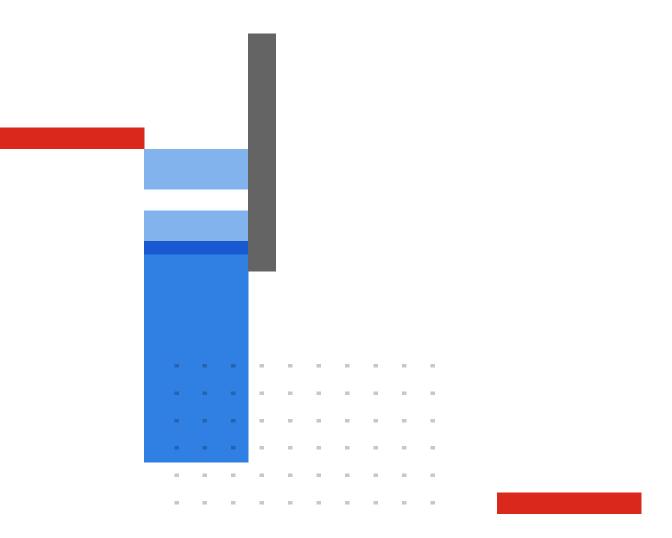



www.fortinet.com

Copyright © 2025 Fortinet, Inc. All rights reserved. Fortinet®, FortiQate®, Fo